

オリオンクリーンエアシステム  
冷凍式圧縮空気除湿装置

# Clean Air System

Low Pressure Loss & Energy Saving

Eco-Friendly Refrigerant Applied

Powerful performance in Asia  
with heavy duty specification



Best Match for Inverter Compressor & Oil-Free Compressor

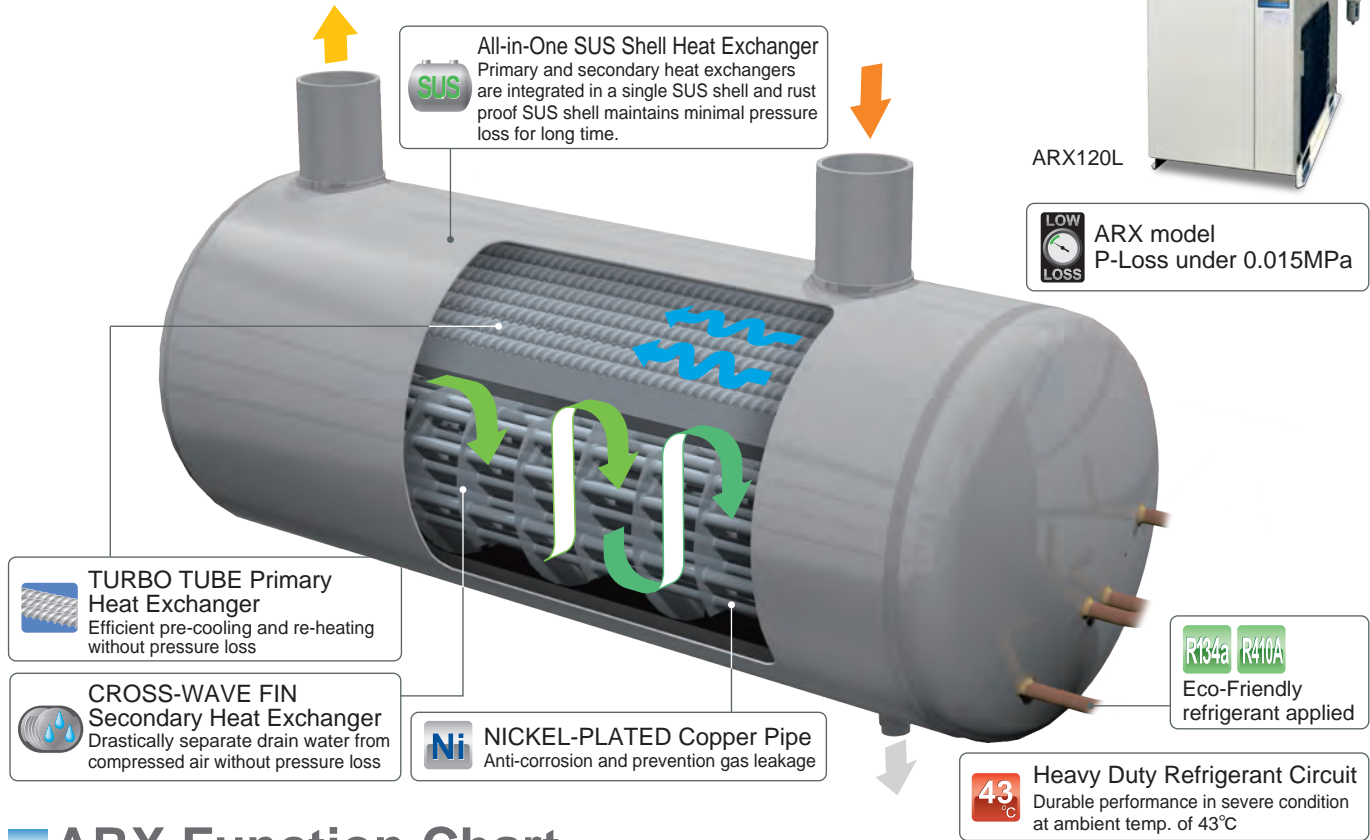
# ORION Refrigerated Air Dryer

Feature-Packed Air Dryer for Energy Saving and Stable Productivity,  
**ORION ARX series (Up to ARX120HL / 180L)**



ARX120L

**LOW LOSS** ARX model  
P-Loss under 0.015MPa


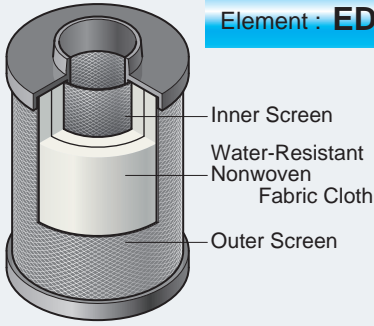
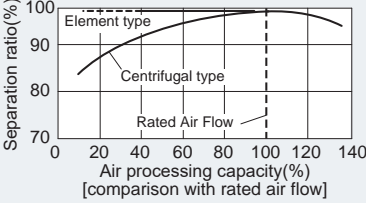

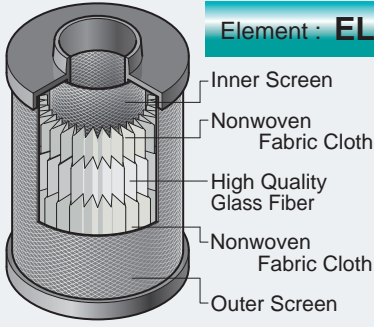
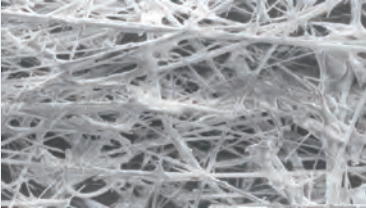

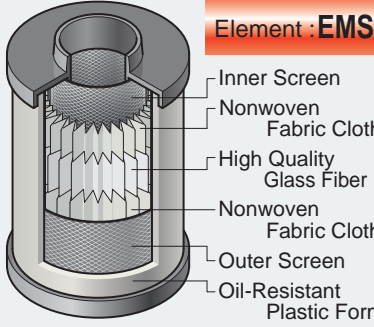
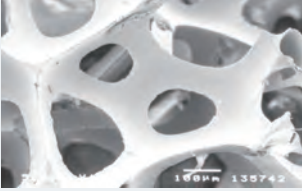
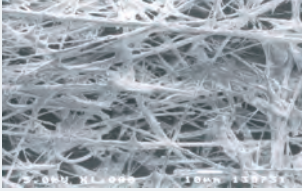

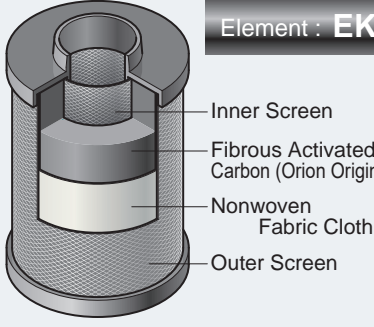
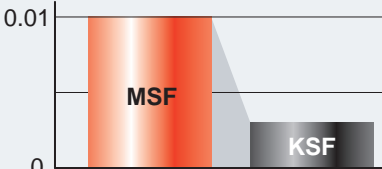


## ARX Function Chart

| Function  | Model : ARX                          |     |     |     |     |     |      |        |        |      |                                  |     |      |      |      |      |      |        |       |       |
|---|--------------------------------------|-----|-----|-----|-----|-----|------|--------|--------|------|----------------------------------|-----|------|------|------|------|------|--------|-------|-------|
|   | Standard inlet air temperature model |     |     |     |     |     |      |        |        |      | High inlet air temperature model |     |      |      |      |      |      |        |       |       |
|   | 5J                                   | 10J | 20J | 30J | 50J | 75J | 100J | 110L   | 120L   | 180L | 3HJ                              | 5HJ | 10HJ | 20HJ | 30HJ | 50HJ | 75HJ | 90HL   | 100HL | 120HL |
| All-in-One SUS Shell Heat Exchanger<br>SUS Shell Heat Exchanger | ●                                    | ●   | ●   | ●   | ●   | ●   | ●    | ●      | ●      | ●    | ●                                | ●   | ●    | ●    | ●    | ●    | ●    | ●      | ●     | ●     |
| TURBO TUBE Primary Heat Exchanger                               | ●                                    | ●   | ●   | ●   | ●   | ●   | ●    | ●      | ●      | ●    | ●                                | ●   | ●    | ●    | ●    | ●    | ●    | ●      | ●     | ●     |
| CROSS-WAVE FIN Secondary Heat Exchanger                         | ●                                    | ●   | ●   | ●   | ●   | ●   | ●    | ●      | ●      | ●    | ●                                | ●   | ●    | ●    | ●    | ●    | ●    | ●      | ●     | ●     |
| NICKEL-PLATED Copper Pipe                                       |                                      |     | ●   | ●   | ●   | ●   | ●    | ●      | ●      | ●    |                                  |     | ●    | ●    | ●    | ●    | ●    | ●      | ●     | ●     |
| R134a / R410A Refrigerant                                       | ●                                    | ●   | ●   | ●   | ●   | ●   | ●    | ●      | ●      | ●    | ●                                | ●   | ●    | ●    | ●    | ●    | ●    | ●      | ●     | ●     |
| Heavy Duty Refrigerant Circuit                                  | ●                                    | ●   | ●   | ●   | ●   | ●   | ●    | ●      | ●      | ●    | ●                                | ●   | ●    | ●    | ●    | ●    | ●    | ●      | ●     | ●     |
| Condenser Filter  |                                      | ●   | ●   | ●   | ●   | ●   | ●    | ●      | ●      | ●    |                                  | ●   | ●    | ●    | ●    | ●    | ●    | ●      | ●     | ●     |
| Wide Adjusting Range CCV (capacity control valve)               | ●                                    | ●   | ●   | ●   | ●   | ●   | ●    | ●      | ●      | ●    | ●                                | ●   | ●    | ●    | ●    | ●    | ●    | ●      | ●     | ●     |
| Operation Lamp  | ●                                    | ●   | ●   | ●   | ●   | ●   | ●    | ●      | ●      | ●    | ●                                | ●   | ●    | ●    | ●    | ●    | ●    | ●      | ●     | ●     |
| Alarm Lamp  |                                      |     |     |     |     |     |      |        |        |      |                                  |     |      |      |      |      |      |        |       |       |
| Evaporating Pressure Gauge                                      |                                      | ●   | ●   | ●   | ●   | ●   | ●    | ●      | ●      | ●    |                                  | ●   | ●    | ●    | ●    | ●    | ●    | ●      | ●     | ●     |
| Air Pressure Gauge  |                                      |     | ●   | ●   | ●   | ●   | ●    | ●      | ●      | ●    |                                  |     | ●    | ●    | ●    | ●    | ●    | ●      | ●     | ●     |
| Long Life Fan-Control Switch                                    | ●                                    | ●   | ●   | ●   | ●   | ●   | ●    | ●      | ●      | ●    | ●                                | ●   | ●    | ●    | ●    | ●    | ●    | ●      | ●     | ●     |
| One Touch Open Front Cabinet                                    | ●                                    | ●   | ●   | ●   | ●   | ●   | ●    | ●      | ●      | ●    | ●                                | ●   | ●    | ●    | ●    | ●    | ●    | ●      | ●     | ●     |
| I/F (Remote ON/OFF, Operation Status, Alarm)                    | Option                               |     |     |     |     | ●   | ●    | ●      | Option |      |                                  |     |      | ●    | ●    | ●    |      |        |       |       |
| Exhaust Duct  |                                      |     |     |     |     |     |      | Option |        |      |                                  |     |      |      |      |      |      | Option |       |       |
| Float Operated Auto Drain Trap FD6 with Ball Valve              |                                      |     |     |     | ●   | ●   | ●    | ●      |        |      |                                  |     |      |      | ●    | ●    | ●    | ●      | ●     |       |
| Float Operated Auto Drain Trap FD2 with Ball Valve              |                                      | ●   | ●   | ●   |     |     |      |        |        |      | ●                                | ●   | ●    |      |      |      |      |        |       |       |
| Float Operated Auto Drain Trap FD2                              | ●                                    |     |     |     |     |     |      |        |        | ●    |                                  |     |      |      |      |      |      |        |       |       |
| Disc Operated Auto Drain Trap AD-5 with Ball Valve              |                                      |     |     |     |     |     |      |        | ●      |      |                                  |     |      |      |      |      |      |        | ●     |       |

# ORION Clean Air Filter

Advanced Technology Packed ORION Clean Air Filter

| Drain Filter DSF  |  | Location   | Before ARX   |
|---|--|--|--|
|    |  <p><b>Element : EDS</b></p> <ul style="list-style-type: none"> <li>Inner Screen</li> <li>Water-Resistant Nonwoven Fabric Cloth</li> <li>Outer Screen</li> </ul> <p>Sectioned Drawing of Element</p>  | <p>Water droplet and solid particulate (5<math>\mu</math>m) removal<br/>                     No water drop in filtration performance<br/>                     Low pressure loss (0.005MPa or less) as pre-Filter<br/>                     Float operated auto drain trap installed</p> <p><b>P-loss 0.005MPa</b></p> | <p><b>Performance Curve</b></p>    |
| Line Filter LSF   |  | Location   | After ARX  |
|   |  <p><b>Element : ELS</b></p> <ul style="list-style-type: none"> <li>Inner Screen</li> <li>Nonwoven Fabric Cloth</li> <li>High Quality Glass Fiber</li> <li>Nonwoven Fabric Cloth</li> <li>Outer Screen</li> </ul> <p>Sectioned Drawing of Element</p>  | <p>Solid particulate (1<math>\mu</math>m, 99.999%) removal<br/>                     High quality glass fiber element installed(ELS)<br/>                     Float operated auto drain trap installed</p> <p><b>P-loss 0.005MPa (Initial)</b></p>  | <p><b>High Quality Glass Fiber</b></p>    |
| Mist Filter MSF   |  | Location   | After LSF  |
|  |  <p><b>Element : EMS-H</b></p> <ul style="list-style-type: none"> <li>Inner Screen</li> <li>Nonwoven Fabric Cloth</li> <li>High Quality Glass Fiber</li> <li>Nonwoven Fabric Cloth</li> <li>Outer Screen</li> <li>Oil-Resistant Plastic Form</li> </ul> <p>Sectioned Drawing of Element</p> | <p>Oil mist (0.01wt ppm) and fine solid particulate (0.01<math>\mu</math>m, 99.999%) removal<br/>                     Newly developed element installed(EMS-H)<br/>                     Float operated auto drain trap installed</p> <p><b>P-loss 0.01 ~ 0.02MPa</b></p>   | <p><b>Oil-Resistant Plastic Form</b></p>  <p><b>High Quality Glass Fiber</b></p>  |
| Carbon Filter KSF   |  | Location   | After MSF  |
|  |  <p><b>Element : EKS</b></p> <ul style="list-style-type: none"> <li>Inner Screen</li> <li>Fibrous Activated Carbon (Orion Original)</li> <li>Nonwoven Fabric Cloth</li> <li>Outer Screen</li> </ul> <p>Sectioned Drawing of Element</p>   | <p>Removes Odor (0.003wt ppm) .<br/>                     Newly developed element "Fibrous Activated Carbon" installed(EKS)<br/>                     Great reduction in amount of loose carbon as compared with previous filters</p> <p><b>P-loss 0.009MPa</b></p>  | <p><b>Output Oil Concentration(wt ppm)</b></p>   |

※All AL-Filter are alumite-treated on the inside surface.

# ORION Refrigerated Air Dryer

## ARX Series



### Standard inlet air temp. model

| Descriptions            | Type                | ARX           |      |      |      |        |       |               |      |        |      |      |
|-------------------------|---------------------|---------------|------|------|------|--------|-------|---------------|------|--------|------|------|
|                         |                     | 5J            | 10J  | 20J  | 30J  | 50J    | 75J   | 100J          | 110L | 120L   | 180L |      |
| Air Processing Capacity | m <sup>3</sup> /min | 0.54          | 1.0  | 2.3  | 4.0  | 6.4    | 9.0   | 12.0          | 13.0 | 19.0   | 26.0 |      |
| Inlet Air Temperature   | °C                  | 10~50         |      |      |      |        |       |               |      |        |      |      |
| Dew Point Temperature   | °C                  | 3~15          |      |      |      |        |       |               |      |        |      |      |
| Ambient Temperature     | °C                  | 2~43          |      |      |      |        |       |               |      |        |      |      |
| Operating Pressure      | MPa                 | 0.2~1.0       |      |      |      |        |       |               |      |        |      |      |
| Dimensions              | Height              | mm            | 480  | 510  | 610  |        | 900   | 990           | 1050 | 1054   | 1229 | 1275 |
|                         | Depth               | mm            | 450  | 600  | 820  |        | 960   | 980           | 1010 | 1022   | 1023 | 1291 |
|                         | Width               | mm            | 180  | 240  | 240  |        | 300   |               | 380  | 470    | 592  | 702  |
| Mass                    | kg                  | 18            | 26   | 35   | 44   | 83     | 94    | 106           | 143  | 181    | 244  |      |
| Pipe Connections        | B                   | R1/2          | R3/4 | R1   |      | R1·1/2 |       | R2            |      | R2·1/2 |      |      |
| Power Source            |                     | 1ph 220V 50Hz |      |      |      |        |       | 3ph 380V 50Hz |      |        |      |      |
| Power Consumption       | kW                  | 0.26          | 0.27 | 0.36 | 0.68 | 1.7    |       | 2.9           | 3.3  | 3.6    |      |      |
| Refrigerant             |                     | R134a         |      |      |      |        | R410A |               |      |        |      |      |

※ Rated condition: Compressed air inlet pressure (gauge pressure): 0.7MPa, Pressure dew point: 10°C, Inlet air temperature: 35°C, Ambient temperature: 30°C  
 ※ Air processing capacity is converted to the suction air condition (atmospheric, 32°C, 75%RH). ※ Please refer to the specifications sheet for further details.

### High inlet air temp. model

| Descriptions            | Type                | ARX           |      |      |      |        |       |               |      |        |       |      |
|-------------------------|---------------------|---------------|------|------|------|--------|-------|---------------|------|--------|-------|------|
|                         |                     | 3HJ           | 5HJ  | 10HJ | 20HJ | 30HJ   | 50HJ  | 75HJ          | 90HL | 100HL  | 120HL |      |
| Air Processing Capacity | m <sup>3</sup> /min | 0.32          | 0.7  | 1.1  | 2.8  | 4.6    | 7.6   | 8.8           | 10.7 | 14.9   | 18.4  |      |
| Inlet Air Temperature   | °C                  | 10~80         |      |      |      |        |       |               |      |        |       |      |
| Dew Point Temperature   | °C                  | 3~15          |      |      |      |        |       |               |      |        |       |      |
| Ambient Temperature     | °C                  | 2~43          |      |      |      |        |       |               |      |        |       |      |
| Operating Pressure      | MPa                 | 0.2~1.0       |      |      |      |        |       |               |      |        |       |      |
| Dimensions              | Height              | mm            | 480  | 510  | 610  |        | 900   | 990           | 1050 | 1054   | 1229  | 1275 |
|                         | Depth               | mm            | 450  | 600  | 820  |        | 960   | 980           | 1010 | 1022   | 1023  | 1291 |
|                         | Width               | mm            | 180  | 240  | 240  |        | 300   |               | 380  | 470    | 592   | 702  |
| Mass                    | kg                  | 18            | 26   | 35   | 44   | 83     | 94    | 106           | 143  | 181    | 244   |      |
| Pipe Connections        | B                   | R1/2          | R3/4 | R1   |      | R1·1/2 |       | R2            |      | R2·1/2 |       |      |
| Power Source            |                     | 1ph 220V 50Hz |      |      |      |        |       | 3ph 380V 50Hz |      |        |       |      |
| Power Consumption       | kW                  | 0.27          | 0.28 | 0.37 | 0.74 | 1.9    | 2.0   |               | 3.4  | 3.7    | 4.0   |      |
| Refrigerant             |                     | R134a         |      |      |      |        | R410A |               |      |        |       |      |

※ Rated condition: Compressed air inlet pressure (gauge pressure): 0.7MPa, Pressure dew point: 10°C, Inlet air temperature: 50°C, Ambient temperature: 35°C  
 ※ Air processing capacity is converted to the suction air condition (atmospheric, 32°C, 75%RH). ※ Please refer to the specifications sheet for further details.

### Heavy Duty model

| Descriptions                    | Type                | ARX               |     |           |      |                     |      |               |      |
|---------------------------------|---------------------|-------------------|-----|-----------|------|---------------------|------|---------------|------|
|                                 |                     | Air Cooled Models |     |           |      | Water Cooled Models |      |               |      |
| Air Processing capacity         | m <sup>3</sup> /min | 23                | 31  | 35        | 45   | 29                  | 41   | 53            | 74   |
| Inlet Air Temperature           | °C                  | 10~60             |     |           |      | 10~60               |      |               |      |
| Dew Point Temperature           | °C                  | 3~15              |     |           |      | 3~15                |      |               |      |
| Ambient Temperature             | °C                  | 2~45              |     |           |      | 2~45                |      |               |      |
| Operation Pressure              | MPa                 | 0.29~1.0          |     |           |      | 0.29~1.0            |      |               |      |
| Dimensions                      | Height              | mm                |     | 1500      | 1500 | 1500                | 1500 | 1500          | 1620 |
|                                 | Depth               | mm                |     | 1500      | 1996 | 1000                | 1000 | 1199          | 1654 |
|                                 | Width               | mm                |     | 802       | 850  | 802                 | 802  | 850           | 877  |
| Mass                            | kg                  | 323               | 385 | 380       | 470  | 278                 | 350  | 395           | 495  |
| Pipe Connections                | FLG                 | 2·1/2B (65 A)     |     | 3B (80 A) |      | 4B (100 A)          |      | 2·1/2B (65 A) |      |
| Dual-Drive Eco System           |                     | —                 |     | ○         |      | —                   |      | ○             |      |
| Power Source                    |                     | 3ph 380V 50Hz     |     |           |      | 3ph 380V 50Hz       |      |               |      |
| Power Consumption               | kW                  | 5.6               | 10  |           | 12   | 4.2                 | 6.8  | 9.5           | 12.5 |
| Recommended Pre-Filter (Option) |                     | DSF2900 A         |     | DSF3500A  |      | DSF5300A            |      | DSF2900A      |      |
| Refrigerant                     |                     | R407C             |     |           |      | R407C               |      |               |      |

※ Rated condition: Compressed air inlet pressure (gauge pressure): 0.7MPa, Pressure dew point: 10°C, Inlet air temperature for air cooled model: 50°C, Ambient temperature for air cooled model: 35°C, Inlet air temperature for water cooled model: 45°C, Cooling water temperature for water cooled model: 32°C at specified water flow rate.  
 ※ Air processing capacity is converted to the suction air condition (atmospheric, 32°C, 75%RH). ※ Please install Drain Filter (DSF) before air dryer to guarantee its performance. ※ Air connection flange : JIS 10K FF, No companion flange is attached. ※ Please refer to the specification sheet for further details.

# ORION Clean Air Filter



## AL Small-size Air Filter

| Descriptions                   | Type                                | Type                |   |         |         |         |         |   |          |                    |          |      |  |
|--------------------------------|-------------------------------------|---------------------|---|---------|---------|---------|---------|---|----------|--------------------|----------|------|--|
|                                |                                     | DSF/LSF             | 75-AL   | 150-AL  | 200-AL  | 250-AL  | 400-AL  | 700-AL  | 1000-AL  | 1300-AL1           | 2000-AL1 |      |  |
|                                |                                     | MSF                 | 75D-AL  | 150D-AL | 200D-AL | 250D-AL | 400D-AL | 700D-AL   | 1000D-AL | 1300D-AL           | 2000D-AL |      |  |
|                                |                                     | KSF                 | —   | 150-AL  | 200-AL  | 250-AL  | 400-AL  | 700-AL  | 1000-AL  | 1300-AL            | 2000-AL  |      |  |
| Air Processing Capacity        |                                     | m <sup>3</sup> /min | 0.35  | 1.2     | 1.8     | 2.7     | 3.9     | 6.6   | 10.6     | 13.8               | 20.0     |      |  |
| Material                       |                                     |                     | Aluminum Die Casting (All AL-Filter are alumite-treated on the inside surface. )                  |         |         |         |         |   |          |                    |          |      |  |
| Operating Range                | Fluid                               |                     | Compressed Air  |         |         |         |         |   |          |                    |          |      |  |
|                                | Inlet Air Pressure                  | MPa                 | 0.05~1.0 (DSF / LSF / MSF 1300AL, 2000AL : 0.1~1.0)   |         |         |         |         |   |          |                    |          |      |  |
|                                | Inlet Air Temperature               | °C                  | 5~60  |         |         |         |         |   |          |                    |          |      |  |
|                                | Ambient Temperature                 | °C                  | 2~60  |         |         |         |         |   |          |                    |          |      |  |
| Performance                    | Filtration                          |                     | DSF : 5µm (Liquid water separation efficiency: 99%) MSF : 0.01µm (Filtration efficiency: 99.999%) |         |         |         |         | LSF : 1µm (Filtration efficiency: 99.999%) KSF : Adsorption by activated carbon fiber |          |                    |          |      |  |
|                                | Outlet Oil Contamination            | wt ppm              | MSF : 0.01 / KSF : 0.003  |         |         |         |         |   |          |                    |          |      |  |
|                                | Pressure Loss                       | MPa                 | DSF: Initial 0.005, LSF: Initial 0.005, MSF: Initial : 0.01 / Usual 0.02, KSF : 0.009             |         |         |         |         |   |          |                    |          |      |  |
| When to replace filter element |                                     |                     | One year or pressure loss 0.02 MPa for DSF, 0.035 MPa for LSF/MSF, whichever comes first.         |         |         |         |         |   |          |                    |          |      |  |
| Connections                    | Pipe Connections                    |                     | Rc3/8   | Rc1/2   | Rc3/4   | Rc1     |         | Rc1 · 1/2   |          | Rc2                |          |      |  |
|                                | Different Pressure Gauge Connection |                     | Rc1/4   |         |         |         |         |   |          |                    |          |      |  |
| Mass                           |                                     | kg                  | 1.0   |         | 2.0     | 2.1     | 2.6     | 5.0   | 6.0      | 6.5                | 9.0      |      |  |
| Accessories                    | Filter Element                      | Type                | EDS/ELS EMS-H/EKS   | 75      | 150     | 200     | 250     | 400   | 700      | 1000               | 1300     | 2000 |  |
|                                |                                     | Quantity            |   | 1       |         |         |         |   |          |                    |          |      |  |
|                                | Auto Drain Trap                     |                     | NH-503MR (built-in), None with KSF  |         |         |         |         |   |          | FD2, None with KSF |          |      |  |
|                                | Differential Pressure Gauge         |                     | DG-50(A) (Option)   |         |         |         |         |   |          |                    |          |      |  |

※ Air processing capacity is converted to the suction air condition (atmospheric, 32°C, 75%RH). ※ All performances are tested at standard air processing capacity (0.7MPa), Inlet oil contamination 3wt ppm(LSF/MSF), 0.01wt ppm(KSF). ※ Oil concentration is measured in conformity with ISO8573-2 "Compressed air - Part 2 : Test methods for oil aerosol content", not including oil-vapor. ※ Please refer to the specification sheet for further details.

## SUS Large-size Air Filter

| Descriptions                   | Type                                | Type                |   |       |                      |       |   |       |   |  |
|--------------------------------|-------------------------------------|---------------------|---|-------|----------------------|-------|---|-------|---|--|
|                                |                                     | DSF/LSF/KSF         | 2900A   | 3500A | 4100A                | 5300A | 6100A   | 8000A |   |  |
|                                |                                     | MSF                 | 2900D   | 3500D | 4100D                | 5300D | 6100D   | 8000D |   |  |
| Air Processing Capacity        |                                     | m <sup>3</sup> /min | 29  | 35    | 41                   | 53    | 61  | 80    |   |  |
| Material                       |                                     |                     | Stainless steel   |       |                      |       |   |       |   |  |
| Operating Range                | Fluid                               |                     | Compressed Air  |       |                      |       |   |       |   |  |
|                                | Inlet Air Pressure                  | MPa                 | LSF/MSF: 0.1~1.0, DSF: 0.2~1.0, KSF: 0.05~1.0   |       |                      |       |   |       |   |  |
|                                | Inlet Air Temperature               | °C                  | 5~60  |       |                      |       |   |       |   |  |
|                                | Ambient Temperature                 | °C                  | 2~60  |       |                      |       |   |       |   |  |
| Performance                    | Filtration                          |                     | DSF : 5µm (Liquid water separation efficiency: 99%) MSF : 0.01µm (Filtration efficiency: 99.999%) |       |                      |       | LSF : 1µm (Filtration efficiency: 99.999%) KSF : Adsorption by activated carbon fiber |       |   |  |
|                                | Outlet Oil Concentration            | wt ppm              | MSF : 0.01 / KSF : 0.003  |       |                      |       |   |       |   |  |
|                                | Pressure Loss                       | MPa                 | DSF: Initial 0.005, LSF: Initial 0.005, MSF: Initial : 0.01 / Usual 0.02, KSF : 0.009             |       |                      |       |   |       |   |  |
| When to replace filter element |                                     |                     | One year or pressure loss 0.02 MPa for DSF, 0.035 MPa for LSF/MSF, whichever comes first.         |       |                      |       |   |       |   |  |
| Connections                    | Pipe Connections                    | FLG                 | 2-1/2B (65A), JIS 10K FF  |       | 3B (80A), JIS 10K FF |       | 4B (100A), JIS 10K FF   |       |   |  |
|                                | Different Pressure Gauge Connection |                     | Rc1/4   |       |                      |       |   |       |   |  |
| Mass                           |                                     | kg                  | 26  | 28    |                      | 48    |   | 95    |   |  |
| Accessories                    | Filter Element                      | Type                | EDS/ELS EMS-H/EKS   | 1300  | 2000                 |       | 2000  |       |   |  |
|                                |                                     | Quantity            |   | 2     | 2                    |       | 3   |       | 4 |  |
|                                | Auto Drain Trap                     |                     | FD-10-A (DSF), FD2 (LSF/MSF), None with KSF   |       |                      |       |   |       |   |  |
|                                | Differential Pressure Gauge         |                     | DG-50(A) (Option)   |       |                      |       |   |       |   |  |
| Stand                          |                                     |                     | —   |       |                      |       |   |       |   |  |

※ Air processing capacity is converted to the suction air condition (atmospheric, 32°C, 75%RH). ※ All performances are tested at standard air processing capacity (0.7MPa), Inlet oil contamination 3wt ppm(LSF/MSF), 0.01wt ppm(KSF). ※ Oil concentration is measured in conformity with ISO8573-2 "Compressed air - Part 2 : Test methods for oil aerosol content", not including oil-vapor. ※ Air connection flange : JIS 10K FF, No companion flange is attached. ※ Please refer to the specification sheet for further details.

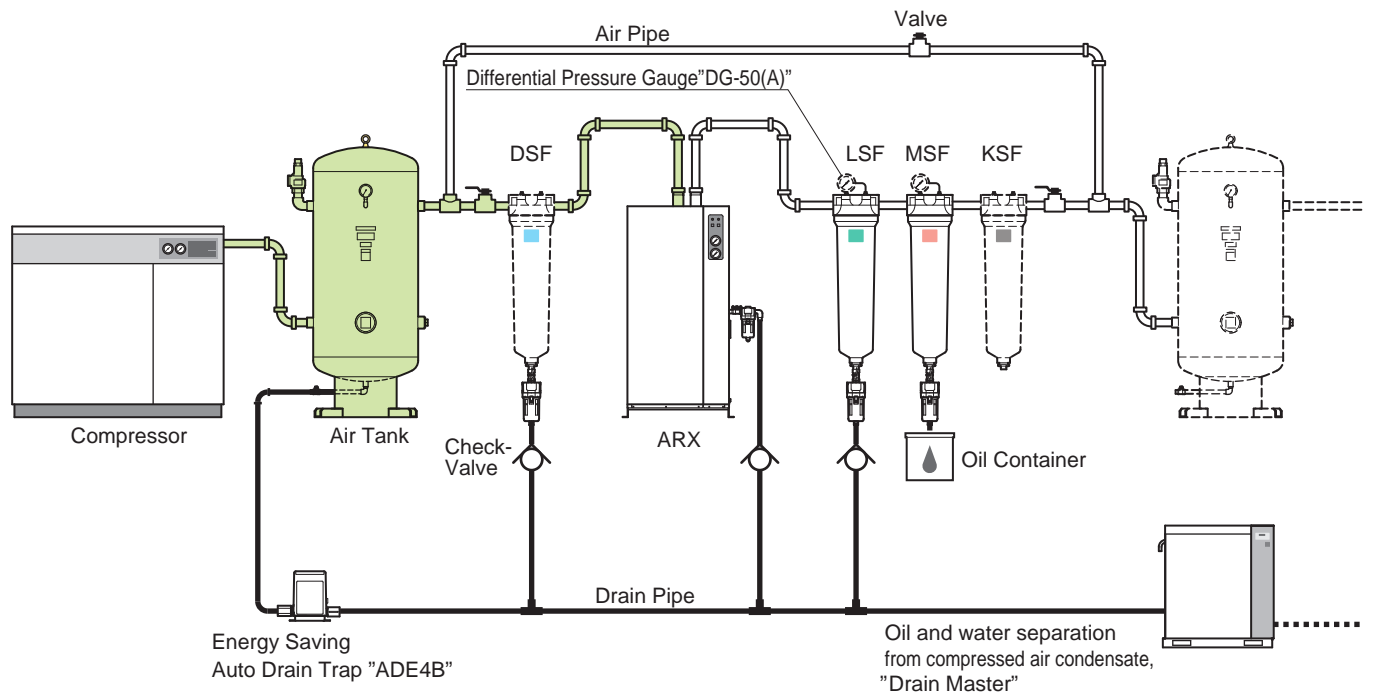
## Basic System Examples

### Air Quality Notes



Please install ORION genuine Clean Air Filters 'before and after ARX dryer' for the best performance.

### Safety Notes

Before operating equipment, please read the operating manual carefully, and only use as indicated. For installation of equipment and required wiring, employ a qualified person or consult with your dealer. Be sure to select equipment which suits your needs. Do not use equipment for purposes other than intended. Doing so can lead to accidents or equipment breakdown.



| System   | Applications  |
|--|---|
| ★ ☆ <b>DSF</b> <b>ARX</b> <b>LSF</b> <b>MSF</b> <b>KSF</b> | General Painting, Precision Machinery Industry, etc |
| ☆ <b>DSF</b> <b>ARX</b> <b>LSF</b> <b>MSF</b>              | Standard Pneumatic                                  |
| <b>ARX</b> <b>LSF</b> <b>MSF</b>                           | Standard Pneumatic                                  |
| ▲ <b>LSF</b> <b>ARX</b> <b>MSF</b>                         | ▲ Not recommended                                   |

- 1) In case no Drain Filter (DSF) before large ARX air dryer (Heavy duty model) does not cover its warranty.
- 2) Please consult with your dealer or ORION directly for further information when compressed air is supplied for medical, food, or clean room use.
- 3) Please set up above ☆ system when Oil-Free compressor is installed.
- 4) Please set up above ★ system when intake air of an air compressor includes large amount of oil droplets.
- 5) ▲ LSF-AL is not recommended to be installed before ARX dryers because it will increase differential pressure.
- 6) Please refer to "Compressed Clean Air catalog" (D-AG02 ) for details of "DRAIN MASTER" series.
- 7) SUS pipe and SUS air tank are recommended when Oil-Free compressor is installed (as indicated in Green). ARX Heat-Exchanger is made of SUS .
- 8) Please install a check valve on exhaust pipe of filter.
- 9) Please consult with your dealer or ORION directly when you are not certain of air tank location (before or after ARX).

# Model Selection

## 1. For Air Dryer

**1** **Temperature conditions**  
 Table A : High Inlet Air Temp. Models  
 Table B : Standard Air Temp. Models  
 Table C : Water Cooled Models  
 Table D : Air Cooled Models  
 Table E : Air Pressure Coefficient

Model selection Example

|                 |      |               |        |           |         |
|-----------------|------|---------------|--------|-----------|---------|
| Inlet Air Temp. | 60°C | Ambient Temp. | 35°C   | Air Flow  | 6m³/min |
| PDP             | 10°C | Air Pressure  | 0.6MPa | Frequency | 50Hz    |

**1** From charts, Inlet temp. coefficient → **0.70**  
 Air Pressure coefficient → **0.93**

**2** Calculate the necessary air capacity for the model selection.  
**Air capacity required = Intake air volume / ( A or B or C or D × E )**

**2** Air capacity required for dryer.  
**6 / (0.70×0.93)=9.2m³/min**

**3** Please select the suitable model from the specification which has bigger Air processing capacity (P3) than the air capacity required.

**3** The suitable model to process 9.2m³/min is ARX90HL, as its capacity exceeds the required value.

### A: Inlet Air Temperature Coefficient ( High Inlet Air Temp. Models )

| Inlet air temperature (°C) |    | 50   |      |      | 60   |      |      | 70   |      |      | 80   |      |      |
|----------------------------|----|------|------|------|------|------|------|------|------|------|------|------|------|
| Outlet dew point (°C)      |    | 5    | 10   | 15   | 5    | 10   | 15   | 5    | 10   | 15   | 5    | 10   | 15   |
| Ambient temperature (°C)   | 30 | 0.78 | 1.06 | 1.27 | 0.62 | 0.80 | 0.92 | 0.53 | 0.68 | 0.82 | 0.48 | 0.63 | 0.79 |
|                            | 35 | 0.73 | 1.00 | 1.21 | 0.57 | 0.70 | 0.86 | 0.47 | 0.60 | 0.74 | 0.41 | 0.57 | 0.71 |
|                            | 40 | 0.55 | 0.75 | 0.91 | 0.44 | 0.56 | 0.66 | 0.37 | 0.46 | 0.55 | 0.33 | 0.42 | 0.51 |

### B: Inlet Air Temperature Coefficient ( Standard Inlet Air Temp. Models )

| Inlet air temperature (°C) |    | 35   |      |      | 40   |      |      | 45   |      |      | 50   |      |      |
|----------------------------|----|------|------|------|------|------|------|------|------|------|------|------|------|
| Outlet dew point (°C)      |    | 5    | 10   | 15   | 5    | 10   | 15   | 5    | 10   | 15   | 5    | 10   | 15   |
| Ambient temperature (°C)   | 25 | 0.87 | 1.10 | 1.31 | 0.72 | 0.86 | 1.05 | 0.60 | 0.72 | 0.86 | 0.55 | 0.69 | 0.76 |
|                            | 30 | 0.80 | 1.00 | 1.20 | 0.66 | 0.79 | 0.96 | 0.55 | 0.66 | 0.79 | 0.50 | 0.63 | 0.70 |
|                            | 35 | 0.78 | 0.94 | 1.15 | 0.63 | 0.74 | 0.92 | 0.51 | 0.62 | 0.74 | 0.46 | 0.57 | 0.65 |
|                            | 40 | 0.73 | 0.88 | 1.08 | 0.58 | 0.65 | 0.86 | 0.47 | 0.56 | 0.68 | 0.40 | 0.51 | 0.58 |

### C: Inlet Air Temperature Coefficient ( Heavy Duty / Water cooled Models )

| Inlet air temperature (°C) |  | 40   |      |      | 45   |      |      | 50   |      |      | 55   |      |      | 60   |      |      |
|----------------------------|--|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| Outlet dew point (°C)      |  | 5    | 10   | 15   | 5    | 10   | 15   | 5    | 10   | 15   | 5    | 10   | 15   | 5    | 10   | 15   |
| Coefficient                |  | 0.88 | 1.14 | 1.14 | 0.77 | 1.00 | 1.14 | 0.66 | 0.91 | 1.10 | 0.59 | 0.83 | 0.98 | 0.54 | 0.75 | 0.89 |

### D: Inlet Air Temperature Coefficient ( Heavy Duty / Air Cooled Models )

| Inlet air temperature (°C) |    | 40   |      |      | 45   |      |      | 50   |      |      | 55   |      |      | 60   |      |      |
|----------------------------|----|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| Outlet dew point (°C)      |    | 5    | 10   | 15   | 5    | 10   | 15   | 5    | 10   | 15   | 5    | 10   | 15   | 5    | 10   | 15   |
| Ambient temperature (°C)   | 30 | 0.85 | 1.15 | 1.37 | 0.83 | 1.12 | 1.35 | 0.78 | 1.06 | 1.27 | 0.67 | 0.88 | 1.04 | 0.62 | 0.80 | 0.92 |
|                            | 32 | 0.82 | 1.12 | 1.34 | 0.80 | 1.09 | 1.31 | 0.76 | 1.03 | 1.24 | 0.64 | 0.85 | 1.01 | 0.60 | 0.75 | 0.89 |
|                            | 35 | 0.79 | 1.09 | 1.30 | 0.77 | 1.06 | 1.28 | 0.73 | 1.00 | 1.21 | 0.62 | 0.81 | 0.98 | 0.57 | 0.70 | 0.86 |
|                            | 40 | 0.60 | 0.81 | 0.98 | 0.58 | 0.80 | 0.96 | 0.55 | 0.75 | 0.91 | 0.47 | 0.62 | 0.75 | 0.44 | 0.56 | 0.66 |

### E: Air Pressure Coefficient

| Air Pressure (MPa) | 0.20 | 0.30 | 0.40 | 0.50 | 0.60 | 0.70 | 0.75 | 0.80 | 0.90 | 0.95 | 1.00 |
|--------------------|------|------|------|------|------|------|------|------|------|------|------|
| Coefficient        | 0.67 | 0.73 | 0.80 | 0.87 | 0.93 | 1.00 | 1.04 | 1.07 | 1.13 | 1.16 | 1.20 |

\*Please ask to ORION dealer about coefficient at dew point 3°C \*The coefficient is only for reference, please ask ORION dealer about its guaranteed performance.

## 2. For Air Filter

Calculate the necessary air capacity for the model selection.





$$\text{Air processing capacity} \geq \frac{\text{Desired capacity}}{\text{Pressure correction coefficient}}$$

### Pressure Correction Coefficient

| Air Pressure (MPa) | 0.20 | 0.30 | 0.40 | 0.50 | 0.60 | 0.70 | 0.80 | 0.90 | 1.00 |
|--------------------|------|------|------|------|------|------|------|------|------|
| Coefficient        | 0.38 | 0.49 | 0.62 | 0.75 | 0.87 | 1.00 | 1.06 | 1.12 | 1.17 |


## Accessories

### Auto Drain Trap

|   |              | FD2-G3  | FD6-G1  | FD-10-A   | AD-5-G7   |
|---|--------------|---|---|---|---|
|   |              |  |  |  |  |
| Maximum drain flow capacity                         |              | 10 cm <sup>3</sup> / cycle  | 30 cm <sup>3</sup> / cycle  | 80 cm <sup>3</sup> / cycle  | 450 L / h   |
| Operable pressure range                             |              | MPa 0.1 ~ 1.0   |   | 0.20 ~ 1.0  | 0.29 ~ 1.0  |
| Operable temperature range                          |              | °C 2 ~ 60   |   |   |   |
| Processed fluid                                     |              | Compressed air drain  |   |   |   |
| Drain release method                                |              | Float operated  |   |   | Disc operated   |
| Connections   | Inlet        | Rc 1/2  |   |   | Rc 1/2  |
|   | Drain outlet | ID $\phi$ 5.7 ~ 6.0<br>OD $\phi$ 8  |   | Rc 3/8  | Rc 1/2  |
| Mass  | kg           | 0.3   | 0.45  | 1   | 1.7   |
| External dimensions<br>(External diameter × Length) |              | mm $\phi$ 63×178  | $\phi$ 80×201   | $\phi$ 96×193   | $\phi$ 86×198   |

※ Drain conditions: Air pressure (gauge pressure): 0.7MPa.  
 ※ Please refer to the specification sheet for further details.

### Differential Pressure Gauge

|   |                  | DG-50(A)  |
|---|------------------|---|
|   |                  |  |
| Max. working pressure<br>(Gauge pressure)                   | Mpa              | 1.0   |
| Pressure difference<br>indication range<br>(Gauge pressure) | Mpa              | 0 ~ 0.15  |
| Pipe connections  |                  | R1/4  |
| External dimensions<br>(External diameter × Length)         | mm               | $\phi$ 70×43  |
| Mass  | kg               | 0.5   |
| Accessories   | Nylon tube       | External diameter $\phi$ 4mm × L1000mm  |
|   | Straight fitting | R1/4× $\phi$ 4mm (For tube)   |
|   | Elbow joint      | R1/4× $\phi$ 4mm (For tube)   |

For inquiries, please contact the following representative:



**Important:**

This catalog contains product specifications as of April, 2023.  
 ● Images in this catalog are printed images and actual product colors may differ from the colors herein.  
 ● Product mechanisms, specifications, etc. listed in this catalog are subject to change without notice.  
 ● Designed by Orion Machinery Japan. Assembled in Thailand.

## ORION MACHINERY ASIA PRODUCTS

### Air Dryer & Air Filter



### Chiller



### Dairy Farm



ORION MACHINERY ASIA CO., LTD.

## ORION MACHINERY ASIA CO., LTD.

33 / 3 Moo 5 Sambundid, U-Thai,  
 Ayutthaya 13210, Thailand  
 TEL : +66-35-246-828  
 FAX : +66-35-246-829  
<https://orion-machinery-asia.com/>

